

Oriental Cooking - Gas Steamer

Gas - Dim Sum Steamer/ Slim

NGDS 16



Due to continuous technical development, the image shown may not represent the latest design of the unit.

DESCRIPTION

Compact gas steamer with six dim sum trays steaming capacity. Equipped with a high-performance burner of 16 kW power rate.

Equipped with a salt-resistant water tank of a volume of 27 liters for continuous steam, intended to use with Bamboo trays Ø 130 mm. Coldwater supply with a faucet to fill the tank, easy operable from the front panel.

Due to the compact design, the NGDS steamer is the perfect choice for any Asian restaurants with a smaller footprint.

OTHER AVAILABLE MODELS

- N/A

MAIN FEATURES

- High-performance atmospheric burner with a power rate of 16 kW.
- Piezo ignition.
- Equipped with pilot burner, safety thermocouple, gas valve, gas knob.
- Salt resistant, stainless steel tank of 27 liters with drain valve.
- Cold water supply with faucet to fill the tank.

CONSTRUCTION

- Sturdy frame made of stainless steel AISI 430.
- Stainless steel top panel (1.2 mm), AISI 304 with orbital surface pattern.
- Front panel (1.0 mm) and side panels (0.8 mm) made of stainless steel AISI 304 with hairline surface pattern.
- Back panel made of stainless steel AISI 304 with hairline surface pattern (0.8 mm).
- Tubular, height adjustable (± 25 mm) stainless steel legs.
- Types of installations: free standing.
- Frame, top and panels, all made of high-grade stainless steel.

INCLUDED ACCESSORIES

- Dim sum plate with six holes.

OPTIONAL ACCESSORIES


- N/A

PT. NAYATI INDONESIA


www.nayati.com

Nayati reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.


FRONT

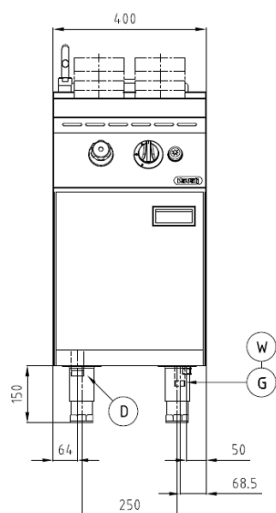

TOP

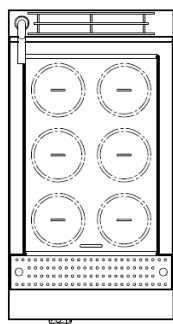

SIDE

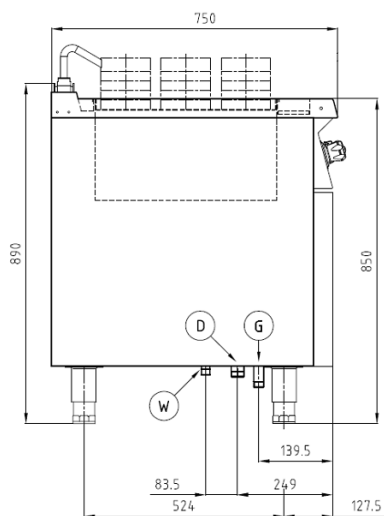

*Overall dimension in mm

TECHNICAL DATA

External Dimensions

Width	: 400 mm
Depth	: 750 mm
Height	: 850 mm

Cooking Surface

Cooking zones	: 27 liters, 320 x 487 mm
---------------	---------------------------

Gas Power Rating

Heat input total	: LPG/LNG 16 kW
No. of burners	: 1
Control type	: High-low power control
Gas type options	: LPG G30, G31 LNG G20, G25

Connections

Gas	: DN 20 (3/4")
Water	: DN15 (1/2")
Drain	: DN25 (1")

Heat & Steam Emissions

Direct heat emission	: LPG/LNG 1.60 kW
Latent heat emission	: LPG/LNG 4.80 kW
Steam emission	: LPG/LNG 7.05 kg/h

PACKAGING DATA

Width	: 430 mm
Depth	: 780 mm
Height	: 970 mm
Volume	: 0.33 m ³

WEIGHT

Net Weight	: 47 kg
Gross Weight	: 58 kg

PT. NAYATI INDONESIA

www.nayati.com

Nayati reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

02/10/2020