

## Refrigeration - Counter - 750

### Counter Chiller - Drawer

#### NRTA 3C 750 9D



Due to continuous technical development, the image shown may not represent the latest design of the unit.

#### DESCRIPTION

Refrigerated counter with 750 mm depth, with 9 drawers in three compartments.

Operating temperature from +2 to +12 °C.

Made entirely of stainless steel AISI 304, internally and externally. High-density CFC/HCFC-free polyurethane insulation with a thickness of 70 mm. Hygienic interior with a dished floor pan. Electronic controller with built-in alarms for high/low temperatures and a numeric display for temperature and other functions. High-efficient refrigeration unit with refrigerant R404A.

#### OTHER AVAILABLE MODELS

- NRTA 1C 750 2D
- NRTA 1C 750 3D
- NRTA 2C 750 4D
- NRTA 2C 750 6D
- NRTA 3C 750 6D
- NRTA 4C 750 8D
- NRTA 4C 750 12D

#### MAIN FEATURES

- Refrigerated counter with 9 drawers GN 1/1 dimension.
- Performs under tropical climate with an ambient temperature of +15 to +40 °C.
- Electronic controller with built-in alarms for high/low temperatures and a numeric display for temperature and other functions.
- Soft closing, over-extension (+75mm), stainless steel telescope rails with a usable drawer height of 110 mm and a maximum load of 35 kg/drawer.
- Energy-efficient anti-condensation door/drawer mullion heaters.
- Lockable door with master keys offering security for the stored products.
- Ducted cold air distribution, ensuring uniform temperature ( $\pm 2^{\circ}\text{C}$ ) among all compartments.
- Slide out/in cassette refrigeration system with a corrosion-resistant coated evaporator and removable condenser filter to support convenient on-site maintenance and servicing.
- Height adjustable, tubular stainless steel legs (-3/+50 mm)
- Off-cycle defrost.

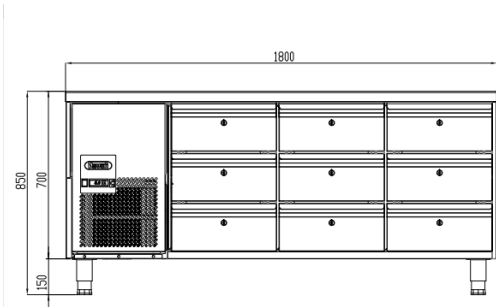
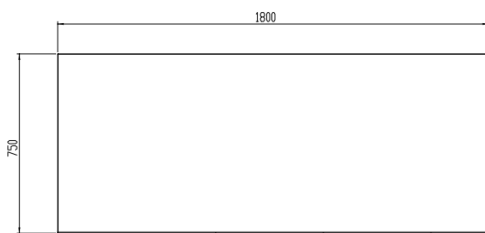
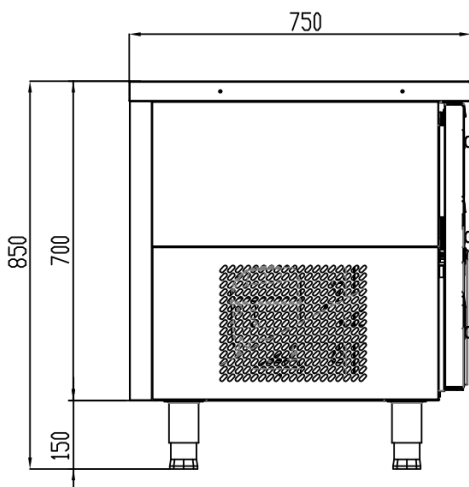
#### CONSTRUCTION

- External construction entirely made of stainless steel AISI 304, thickness 0.5 mm.
- Internal construction entirely made of stainless steel AISI 304, thickness 0.5 mm.
- Top and front panel stainless steel AISI 304 with 1 mm thickness and hairline surface pattern. Top height as of 45 mm.
- Side panel stainless steel AISI 304 with 0.5 mm thickness and hairline surface pattern
- Insulated drawers with a thickness of 70 mm.
- Insulated body with high-density CFC/HCFC-free polyurethane insulation of 70 mm. Top plate with 70 mm insulation.
- Easy to clean one-piece stainless steel dished floor with radiused corners for enhanced hygiene.
- Removable, washable condenser air filter.

PT. NAYATI INDONESIA

[www.nayati.com](http://www.nayati.com)

Nayati reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

**FRONT****TOP****SIDE**

\*Overall dimension in mm

**TECHNICAL DATA****External Dimensions**

Width	: 1800 mm
Depth	: 750 mm
Height	: 850 mm

**Internal Dimensions**

Width	: 1280 mm
Depth	: 560 mm
Height	: 560 mm
Volume	: 401 liters

**Refrigeration Properties**

Refrigerant	: R404A
Temperature	: +2 °C ...12 °C
Control type	: Temperature controlled

**Electrical Supply Data**

Energy consumption	: N/A kW / 24 hours
Connected Load	: 0.7 W
Refrigeration Output	:
	700 W / to -10 °C

Voltage	: 230V, 1PNE AC / 50 Hz
Recommended fuse	: 10A (slow)
Starting current	: N/A A
Running current	: N/A A

**Heat Emissions**

Direct heat emission	: 0.49
----------------------	--------

**PACKAGING DATA**

Width	: 1860 mm
Depth	: 800 mm
Height	: 970 mm
Volume	: 1.44 m <sup>3</sup>

**WEIGHT**

Net Weight	: 150 kg
Gross Weight	: 184 kg

**INCLUDED ACCESSORIES**

- Power cable, H07RN-F (3x 2.5 mm).
- Washable condenser filter.

**OPTIONAL ACCESSORIES**

- N/A

PT. NAYATI INDONESIA

www.nayati.com

Nayati reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

1/30/2025