

Total Food Service Solutions

Smart Oven - Proofer Electric - Proofer

NBP 8-S2



Due to continuous technical development, the image shown may not represent the latest design of the unit.

DESCRIPTION

Electric Proofer with the roll-in capacity of 8 bakery trays.

Designed to be used along with Bakomatic Bakery Convection. Suitable for Cafe solution with NBE 4T2 and NEDO 60.50-@

Compact design to be used along with NEDO 60.50 or NBE 4T2. Tray to be stored with 75 mm tray pitch distance.

OTHER AVAILABLE MODELS

- NBP 8-S1
- NBP 10-D1

MAIN FEATURES

- Proofing temperature range of 30 to 45 degree Celcius.
- Humidty settings range from 0 to 100%.
- Equipped with vertical runners for bakery tray access.
- Door is completed with durable gasket to prevent temperature/humidity from seeping out.
- Framed door with glass window to observe proofing results.
- Equipped with castors for mobility in stacking configuration.
- Controlled with seven-segment interface for time, temperature and humidity display and adjustment.
- Proofing capacity tested for 128 pieces of 30 gram-croissants.
- Proofing capacity tested for 96 pieces of 35 gram-danish raisin.

CONSTRUCTION

Exterior panel constructed from stainless steel 304.

• Tempered glass door made of single layer to insulate heat inside the chamber.

INCLUDED ACCESSORIES

• Bakery tray runners.

OPTIONAL ACCESSORIES


• N/A

CE

PT. NAYATI INDONESIA

www.nayati.com

Nayati reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

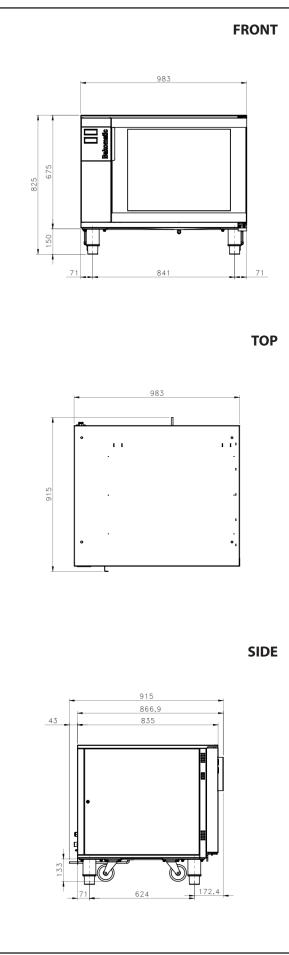

^{*}Overall dimension in mm

TECHNICAL DATA

External Dimensions

Width	: 983 mm
Depth	: 913 mm
Height	: 825 mm

Cooking Surface

Cooking zones	: 8 bakery trays of 400 x 600 mm.
Heating zones	: 1
Control type	: Temperature and Timer control

Electrical Supply Data

Total connected load	: 1.9 kW
Voltage	: 230V, 1NPE AC / 50-60 Hz
Recommended fuse	: 0.5 A (slow)

Connections

Water	: DN 20 (3/4")
Drain	: DN 10 (3/8")

Heat & Steam Emissions

Direct heat emission	: 0.23 kW
Latent heat emission	: 0.34 kW
Steam emission	: 0.5 kg/h

PACKAGING DATA

Width	: 1050 mm
Depth	: 975 mm
Height	: 980 mm
Volume	: 1.00 m ³

WEIGHT

Net Weight	: 104.5 kg
Gross Weight	: 135 kg

NBP 8-S2 Electric - Proofer Smart Oven - Proofer

PT. NAYATI INDONESIA

www.nayati.com

Nayati reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions. 23/01/2021

