

Modular Cooking - Amicus

Electric - Flat Induction

NEFI 4-60 1AM



Due to continuous technical development, the image shown may not represent the latest design of the unit.

DESCRIPTION

Table top electric flat induction with 600 mm depth and 3.5 kW round coil induction.

Usable for boiling, steaming, frying, braising, simmering and steam frying.

Made of AISI 304 with 1.2 mm top thickness, power level control, 180 mm diameter round coil, 6 mm thick tempered glass

OTHER AVAILABLE MODELS

- NEWI 4-60 1AM

MAIN FEATURES

- Powered with a 3.5 kW round coil induction with 180 mm diameter.
- Controlled with gradual 9 power level and timer function. Completed with LED indicator.
- Induction coil with 180 mm diameter
- Glass dimension of 350 x 350 x 6 mm
- Induction generator is cooled with the filter system underneath.
- Thermal-cut off when overheated.
- Minimum pan detection of 18 cm diameter pan/pot.

CONSTRUCTION


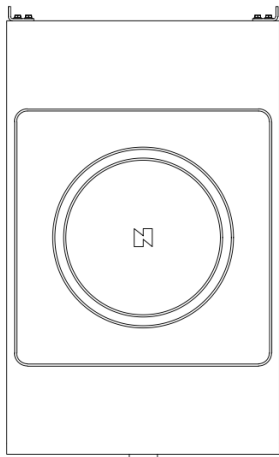
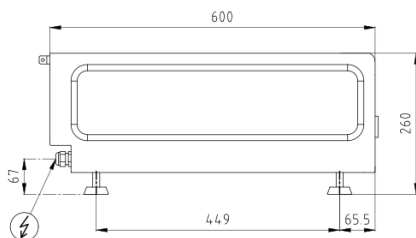
- External construction entirely with AISI 304.
- Top panel with 1.2 mm thickness. Orbital surface finishing: resistant toward scratches.
- Side panel with 1.2 mm deep-drawn surface.
- Front panel with 0.8 mm deep-drawn surface.
- Top panel with Orbital scratch-preventing finish.
- Rubber leg with 40 mm height
- Connector between Amicus product on the back.
- IPX4 water protection level.

INCLUDED ACCESSORIES

- Power cable, H07RN-F (3x 2.5 mm).
- Amicus joining clip.

OPTIONAL ACCESSORIES

- Ferritic pan.

FRONT**TOP****SIDE**

*Overall dimension in mm

TECHNICAL DATA**External Dimensions**

Width	: 380 mm
Depth	: 600 mm
Height	: 260 mm

Cooking Surface

Cooking zones	: 350 x 350 mm
Heating zones	: 1
Control type	: Modulating power control

Electrical Supply Data

Total connected load	: 3.5 kW
Voltage	: 230V, 1NPE AC / 50-60 Hz
Recommended fuse	: 20 A (slow)

Connections

Water	: N/A
Drain	: N/A

Heat & Steam Emissions

Direct heat emission	: 0.7 kW
Latent heat emission	: 0.28 kW
Steam emission	: 0.41 kg/h

PACKAGING DATA

Width	: 410 mm
Depth	: 630 mm
Height	: 380 mm
Volume	: 0.10 m ³

WEIGHT

Net Weight	: 22 kg
Gross Weight	: 26 kg

PT. NAYATI INDONESIAwww.nayati.com

Nayati reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

07/06/2021