

Modular Cooking - Grandis

Electric - Hot Plate

NEHP 8-90 OV GR



Due to continuous technical development, the image shown may not represent the latest design of the unit.

DESCRIPTION

Modular electric hot plate with 900 mm depth, powered with 4 sets of 4 kW hot plate heaters. Static 2/1 GN electric oven with 6 kW incoloy rod heater.

Usable for boiling, steaming, frying, braising, simmering and steam frying. Oven module usable for roasting and baking.

Made of AISI 304 with 2 mm top thickness, equipped with deep drawn collared hot plate element. Oven is sized for 2/1 GN with reflective AISI cavity for superior heat transfer.

OTHER AVAILABLE MODELS

- NEHP 12-90 GR
- NEHP 12-90 OV GR
- NEHP 4-90 GR
- NEHP 8-90 GR

MAIN FEATURES

- Powered with 4 sets of 4 kW hot plate heaters.
- Static 2/1 GN electric oven is powered with 6 kW incoloy heater 2/1 GN cavity and reflective AISI chamber to improve thermal efficiency.
- Rectangular hot plate with 300 x 300 mm designed for performance.
- Six levels of heating.
- Collared hot plate for better durability.
- Heating zones are recessed to minimized spillage.

CONSTRUCTION

- External construction entirely with AISI 304.
- Top panel with 2 mm thickness. Orbital surface finishing: resistant toward scratches.
- Front panel is constructed of 1 mm AISI 304 with satin surface finish.
- Side panel is constructed of 0.8 mm AISI 304 with satin surface finish.
- Adjustable +/- 25 mm AISI leg.
- Connector between Grandis product on the front and the back.
- IPX4 water protection level.


INCLUDED ACCESSORIES

- 2/1 GN oven wire tray (1 pcs.).


OPTIONAL ACCESSORIES

- Joint clip GR.
- Power cable, H07RN-F (5 x 10 mm) p/mtr.


FRONT

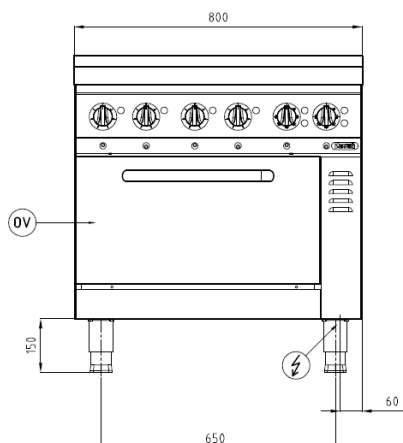

TOP

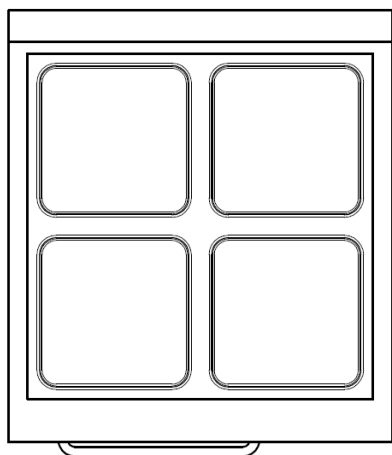

SIDE

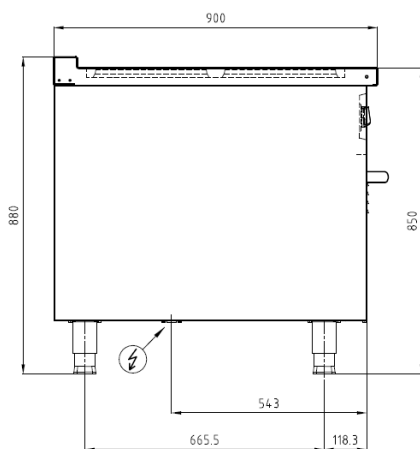

*Overall dimension in mm

TECHNICAL DATA

External Dimensions

Width	: 800 mm
Depth	: 900 mm
Height	: 850/880 mm

Cooking Surface

Cooking zones	: Hot Plate: 4 x 300 x 300 mm, Oven : 575 x 666 mm
Heating zones	: 7
Control type	: Hot plate: Modulating power control, Oven: Modulating temperature control

Electrical Supply Data

Total connected load	: 22 kW
Voltage	: 400V, 3NPE AC /50-60Hz
Recommended fuse	: 32 A (slow)

Connections

Water	: N/A
Drain	: N/A

Heat & Steam Emissions

Direct heat emission	: 6.26 kW
Latent heat emission	: 2.64 kW
Steam emission	: 3.89 kg/h

PACKAGING DATA

Width	: 830 mm
Depth	: 930 mm
Height	: 1000 mm
Volume	: 0.77 m ³

WEIGHT

Net Weight	: 159 kg
Gross Weight	: 188 kg

PT. NAYATI INDONESIA

www.nayati.com

Nayati reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

07/06/2021