

Oriental Cooking - Electric Steamer
Electric - Three Deck Steam Cabinet
NESCD 9-90



Due to continuous technical development, the image shown may not represent the latest design of the unit.

DESCRIPTION

Electric steam cabinet with three decks. Equipped with high-efficient heaters with 27 kW total connected load for quick steam.

Each steam chamber individually controlled with three steaming operations to achieve the ideal balance between performance and energy-saving when needed.

Powerful, compact, and suitable for rice and any steamed food, the NESCD steamer is the perfect choice for high-frequent Asian restaurants.

OTHER AVAILABLE MODELS

- N/A

MAIN FEATURES

- High-efficient heaters with a total connected load of 27 kW.
- Three level rotary switch with control knob and function indication lights.
- Three, individually controlled steam chambers. Top & middle deck with 660/615/220 mm, bottom deck 660/615/400 mm (w/d/h) internal dimensions.
- Steam box engine with a automatic filling system and security thermostat.
- CE certified unit.

CONSTRUCTION

Sturdy frame made of stainless steel AISI 430.

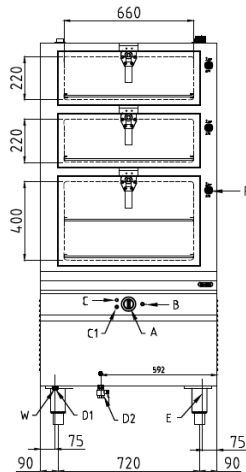

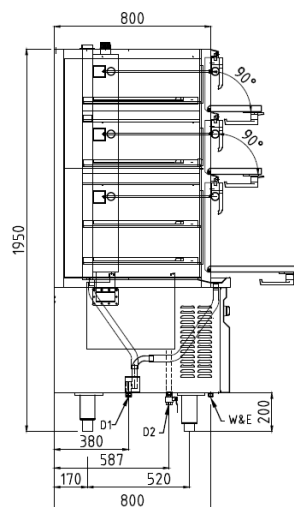
- Front and side panels made of stainless steel AISI 304 with hairline surface pattern (0.8 mm).
- Back panel made of stainless steel AISI 304 with hairline surface pattern (0.8 mm).
- Tubular, height adjustable (± 25 mm) stainless steel legs.
- Types of installations: free standing or placed on a plinth.
- Unit made of high-grade stainless steel.

INCLUDED ACCESSORIES

- N/A

OPTIONAL ACCESSORIES

- Power cable type: H07RN-F (5 x 6 mm²).

FRONT**TOP****SIDE**

*Overall dimension in mm

TECHNICAL DATA**External Dimensions**

Width	: 900 mm
Depth	: 900 mm
Height	: 1950 mm

Cooking Surface

Cooking zones	: 660 x 615 (3pcs) mm
Heating zones	: 1 x 27 kW
Control type	: High-low power control

Electrical Supply Data

Total connected load	: 27 kW
Voltage	: 400V, 3NPE AC /50-60Hz
Recommended fuse	: 50 A (slow)

Connections

Water	: DN15 (1/2")
Drain	: DN20 (3/4") & DN20 (3/4")

Heat & Steam Emissions

Direct heat emission	: 3.24 kW
Latent heat emission	: 4.86 kW
Steam emission	: 7.16 kg/h

PACKAGING DATA

Width	: 930 mm
Depth	: 930 mm
Height	: 2070 mm
Volume	: 1.79 m ³

WEIGHT

Net Weight	: 225 kg
Gross Weight	: 324 kg