

Asian Cooking - Electric Steamer
Electric - Three Deck Steam Cabinet
NESCD 9-90



Due to continuous technical development, the image shown may not represent the latest design of the unit.

DESCRIPTION

Electric steam cabinet with three decks. Equipped with high-efficient heaters with 27 kW total connected load for quick steam.

Each steam chamber individually controlled with three steaming operations to achieve the ideal balance between performance and energy-saving when needed.

Powerful, compact, and suitable for rice and any steamed food, the NESCD steamer is the perfect choice for high-frequent Asian restaurants.

OTHER AVAILABLE MODELS

- N/A

MAIN FEATURES

- High-efficient heaters with a total connected load of 27 kW.
- Three level rotary switch with control knob and function indication lights.
- Three, individually controlled steam chambers. Top & middle deck with 660/600/220 mm, bottom deck 660/600/380 mm (w/d/h) internal dimensions.
- Steam box engine with a automatic filling system and security thermostat.
- CE certified unit.

CONSTRUCTION

- Sturdy frame made of stainless steel AISI 304.
- Front and side panels made of stainless steel AISI 304 with hairline surface pattern (0.8 mm).
- Back panel made of stainless steel AISI 304 with hairline surface pattern (1.0 mm).
- Tubular, height adjustable (± 10 mm) stainless steel legs.
- Types of installations: free standing or placed on a plinth.
- Unit made of high-grade stainless steel.


INCLUDED ACCESSORIES

- Stainless steel wire grills 600x650 mm (4 pcs).


OPTIONAL ACCESSORIES

- Power cable type: H07RN-F (5 x 10 mm²).


FRONT

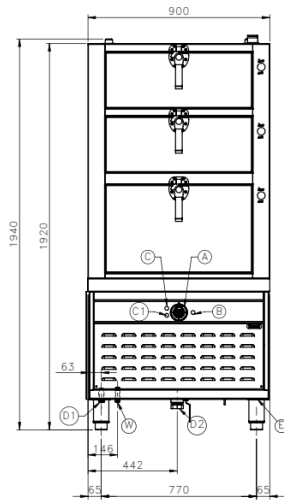

TOP



SIDE

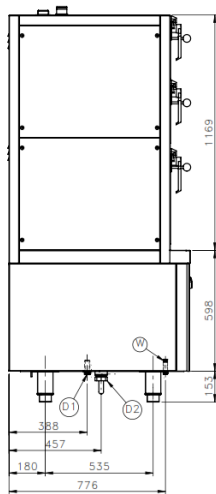

*Overall dimension in mm

TECHNICAL DATA

External Dimensions

Width : 900 mm
 Depth : 900 mm
 Height : 1920 mm

Cooking Surface

Cooking zones : 660 x 600 (3pcs) mm
 Heating zones : 1 x 27 kW
 Control type : High-low power control

Electrical Supply Data

Total connected load : 27 kW
 Voltage : 400V, 3PNE AC /50-60Hz
 Recommended fuse : 50 A (slow)

Connections

Water : DN15 (1/2")
 Drain : DN20 (3/4") & DN40 (1 1/2")

Heat & Steam Emissions

Direct heat emission : 3.24 kW
 Latent heat emission : 4.86 kW
 Steam emission : 7.16 kg/h

PACKAGING DATA

Width : 1000 mm
 Depth : 1020 mm
 Height : 2120 mm
 Volume : 2.16 m³

WEIGHT

Net Weight : 225 kg
 Gross Weight : 324 kg