

Modular Cooking - Tilting Pan

Electric - Tilting Pan

NETP 3GN TC GR



Due to continuous technical development, the image shown may not represent the latest design of the unit.

DESCRIPTION

Modular electric tilting braising pan with 900 mm depth, sized for 3 x 1/1 GN with usable volume of 105 liters, powered with Steady State Surface heaters.

Usable for multitude application: boiling, steaming, frying, braising and simmering.

Made of AISI 304 with 2 mm top thickness, griddle is made of 18 mm thick clad plate of 3 mm SS 316 and 15 mm S355JR steel steel, that prevent rust and deliver good thermal conductivity. Motorized tilting configured with low speed for stable transfer of food to the pan.

OTHER AVAILABLE MODELS

- NETP 2GN TC GR

MAIN FEATURES

- Powered with 20.4 kW SSS heaters.
- Gross capacity of 120 liters and net capacity of 105 liters.
- Designed with left and right column with unifying frame that connects the frame and the pan.
- Motorized tilting for ease of operation. Operating at low speed for stable transfer of food to the pan.
- Welded AISI griddle AISI 420 with thickness of 20 mm, preventing rust.
- Temperature control from 100 to 300 degree Celsius.
- Touch screen interface to adjust energy level, temperature and time.

CONSTRUCTION

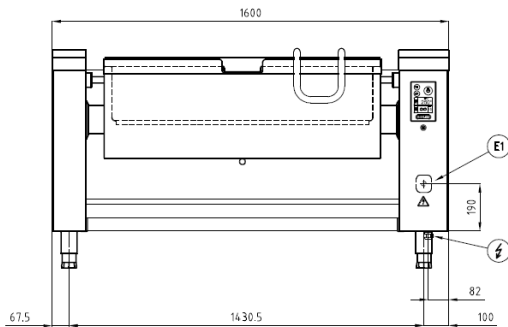
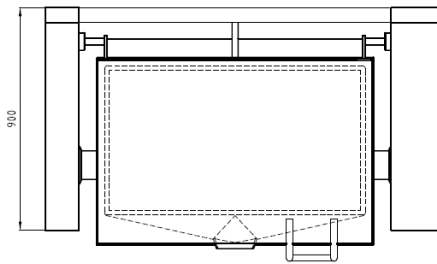
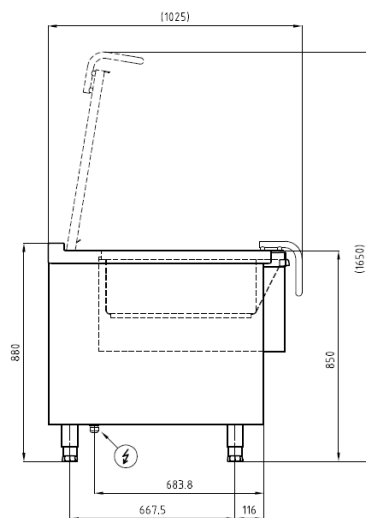
- External construction entirely with AISI 304.
- Top panel with 2 mm thickness. Orbital surface finishing: resistant toward scratches.
- Front panel is constructed of 1 mm AISI 304 with satin surface finish.
- Side panel is constructed of 0.8 mm AISI 304 with satin surface finish.
- Adjustable +/- 25 mm AISI leg.
- Cabinet executed with H2 radius.
- IPX5 water protection level.

INCLUDED ACCESSORIES

- N/A

OPTIONAL ACCESSORIES

- Power cable, H07RN-F (5 x 6 mm) p/mtr.
- Plinth base.
- Unifying column set between two units.
- Volume measuring stick
- Column swivel faucet.

FRONT**TOP****SIDE**

*Overall dimension in mm

TECHNICAL DATA**External Dimensions**

Width	: 1600 mm
Depth	: 900 mm
Height	: 850/880 mm

Cooking Surface

Cooking zones	: 105 liters (3 x GN 1/1), 1050 x 600 mm
Heating zones	: 1
Control type	: Temperature, energy and time control

Electrical Supply Data

Total connected load	: 20.4 kW
Voltage	: 400V, 3NPE AC /50-60Hz
Recommended fuse	: 40 A (slow)

Connections

Water	: N/A
Drain	: N/A

Heat & Steam Emissions

Direct heat emission	: 9.18 kW
Latent heat emission	: 8.16 kW
Steam emission	: 11.99 kg/h

PACKAGING DATA

Width	: 1630 mm
Depth	: 930 mm
Height	: 1000 mm
Volume	: 1.52 m ³

WEIGHT

Net Weight	: 347 kg
Gross Weight	: 456 kg

PT. NAYATI INDONESIAwww.nayati.com

Nayati reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

16/03/2021