

## Modular Cooking - Meritus

### Electric - Vapour Grill

#### NEVG 4-75 (ME)



Due to continuous technical development, the image shown may not represent the latest design of the unit.

#### DESCRIPTION

Modular electric vapour grill with 750 mm depth, powered with 1 x 3.2 kW flat tube incoloy heaters. Equipped with open cabinet.

Usable for charcoal grilling with cast iron, suitable for grilling meat and vegetables.

Made of AISI 304 with 1.5 mm top thickness, equipped with Modulating power control, heater can be tilted up for ease of cleaning.

#### OTHER AVAILABLE MODELS

- NEVG 8-75 (ME)

#### MAIN FEATURES

- Powered with a 3.2 kW flat tubular heating element.
- Single grill zone.
- Flat tube heater ensure durability and performance.
- heater can be tilted up for ease of cleaning.
- Water and grease from the grill basin is drained through DN20 (3/4") connection.

#### CONSTRUCTION

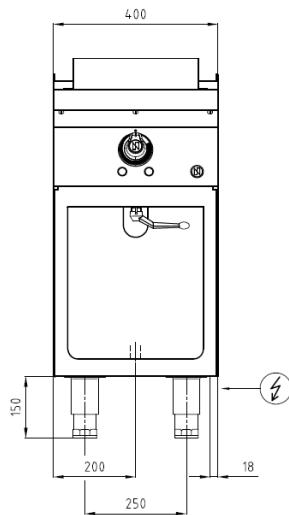
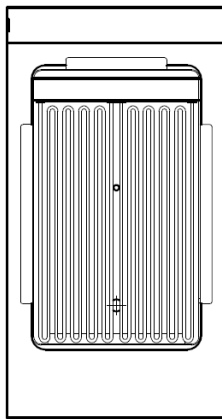
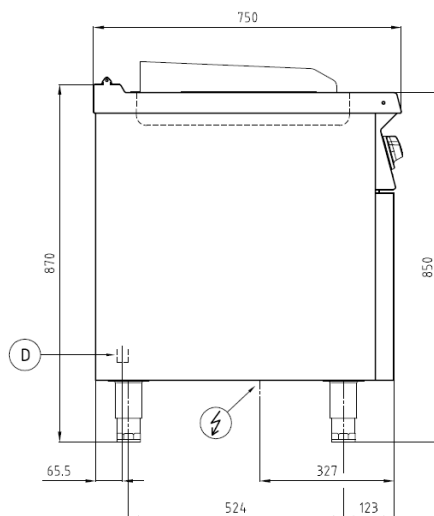
- External construction entirely with AISI 304.
- Top panel with 1.5 mm thickness. Orbital surface finishing: resistant toward scratches.
- Front panel is constructed of 0.8 mm AISI 304 with satin surface finish.
- Side panel is constructed of 0.8 mm AISI 304 with satin surface finish.
- Adjustable +/- 25 mm AISI leg.
- Nayati connection system between Meritus products on the front panels, cabinets, and splashbacks.
- Cabinet executed with H2 radius.
- Deep drawn front panel to minimize liquid penetration to the internal part.
- Gasket protection behind the knobs to prevent water to seeping in, prolonging main heating regulation parts.
- IPX5 water protection level.

#### INCLUDED ACCESSORIES

- Three-sided splashback.

#### OPTIONAL ACCESSORIES

- Power cable, H07RN-F (5 x 2.5 mm) p/mtr.
- Joint clip ME.
- Swing door 4-75 ME.

**FRONT****TOP****SIDE**

\*Overall dimension in mm

**TECHNICAL DATA****External Dimensions**

Width	: 400 mm
Depth	: 750 mm
Height	: 850/870 mm

**Cooking Surface**

Cooking zones	: 310 x 512 mm
Heating zones	: 1
Control type	: Modulating power control

**Electrical Supply Data**

Total connected load	: 3.2 kW
Voltage	: 400V, 3NPE AC /50-60Hz
Recommended fuse	: 16 A (slow)

**Connections**

Water	: N/A
Drain	: DN 20 (3/4")

**Heat & Steam Emissions**

Direct heat emission	: 1.05 kW
Latent heat emission	: 1.28 kW
Steam emission	: 1.88 kg/h

**PACKAGING DATA**

Width	: 430 mm
Depth	: 780 mm
Height	: 990 mm
Volume	: 0.33 m <sup>3</sup>

**WEIGHT**

Net Weight	: 23 kg
Gross Weight	: 31 kg