

Modular Cooking - Meritus

Electric - Wok Induction

NEWI 8-75 (ME)



Due to continuous technical development, the image shown may not represent the latest design of the unit.

DESCRIPTION

Modular electric wok induction with 750 mm depth, powered with 8 kW round induction wok coil with 390 mm diameter.

Usable for wok sauteeing, boiling, simmering and shallow frying.

Made of AISI 304 with 1.5 mm top thickness, power level control, 290 mm diameter wok round coil, 5 mm thick curved tempered glass. Glass is reinforced with wok dome for ease of operation and durability.

OTHER AVAILABLE MODELS

- NEWI 8-75 (ME) SO5

MAIN FEATURES

- Powered with 8 kW round wok coil induction with 390 mm diameter.
- Single wok cooking zone.
- Induction glass of 390 mm diameter with 4 mm thickness.
- Controlled with gradual 5 power level. Completed with LED indicator.
- Induction generator is cooled with the filter system underneath.
- Thermal-cut off when overheated.

CONSTRUCTION

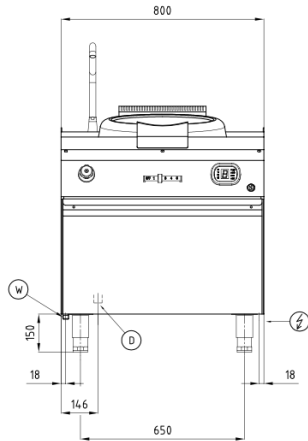

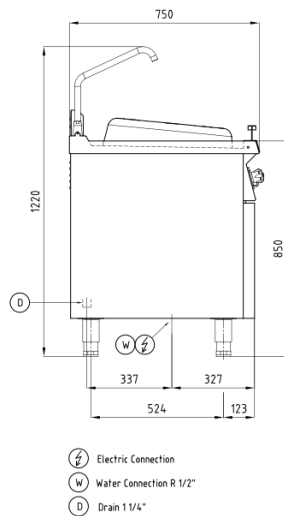
- External construction entirely with AISI 304.
- Top panel with 1.5 mm thickness. Orbital surface finishing: resistant toward scratches.
- Front panel is constructed of 0.8 mm AISI 304 with satin surface finish.
- Side panel is constructed of 0.8 mm AISI 304 with satin surface finish.
- Adjustable +/- 25 mm AISI leg.
- Nayati connection system between Meritus products on the front panels, cabinets, and splashbacks.
- Deep drawn front panel to minimize liquid penetration to the internal part.
- IPX4 water protection level.

INCLUDED ACCESSORIES

- Wok stand.
- Generator filter.
- Double ear wok made of Stainless Steel 409.

OPTIONAL ACCESSORIES

- Power cable, H07RN-F (5 x 2.5 mm) p/mtr.
- Joint clip ME.

FRONT**TOP****SIDE**

*Overall dimension in mm

TECHNICAL DATA**External Dimensions**

| | |
|--------|---------------|
| Width | : 800 mm |
| Depth | : 750 mm |
| Height | : 850/1220 mm |

Cooking Surface

| | |
|---------------|----------------------------|
| Cooking zones | : Ø 390 mm |
| Heating zones | : 1 |
| Control type | : Modulating power control |

Electrical Supply Data

| | |
|----------------------|--------------------------|
| Total connected load | : 8 kW |
| Voltage | : 400V, 3PNE AC /50-60Hz |
| Recommended fuse | : 16 A (slow) |

Connections

| | |
|-------|------------------|
| Water | : DN 15 (1/2") |
| Drain | : DN 32 (1 1/4") |

Heat & Steam Emissions

| | |
|----------------------|-------------|
| Direct heat emission | : 0.56 kW |
| Latent heat emission | : 0.22 kW |
| Steam emission | : 0.33 kg/h |

PACKAGING DATA

| | |
|--------|-----------------------|
| Width | : 830 mm |
| Depth | : 780 mm |
| Height | : 990 mm |
| Volume | : 0.64 m ³ |

WEIGHT

| | |
|--------------|---------|
| Net Weight | : 71 kg |
| Gross Weight | : 92 kg |