

Modular Cooking - Grandis

Electric - Wok Induction

NEWI 8-90 GR



Due to continuous technical development, the image shown may not represent the latest design of the unit.

DESCRIPTION

Modular electric wok induction with 900 mm depth, powered with 8 kW round induction wok coil with 400 mm diameter. Equipped with open cabinet.

Usable for wok sauteeing, boiling, simmering and shallow frying.

Made of AISI 304 with 2 mm top thickness, power level control, 400 mm diameter wok round coil, 5 mm thick curved tempered glass. Glass is reinforced with wok dome for ease of operation and durability.

OTHER AVAILABLE MODELS

- N/A

MAIN FEATURES

- Powered with 8 kW round wok coil induction with 400 mm diameter.
- Induction glass of 400 mm diameter with thickness of 5 mm.
- Controlled with gradual 5 power level and timer function. Completed with LED indicator.
- Induction generator is cooled with the filter system underneath.
- Thermal-cut off when overheated.
- Glass is reinforced with dome for ease of operation and durability.

CONSTRUCTION

- External construction entirely with AISI 304.
- Top panel with 2 mm thickness. Orbital surface finishing: resistant toward scratches.
- Front panel is constructed of 1 mm AISI 304 with satin surface finish.
- Side panel is constructed of 0.8 mm AISI 304 with satin surface finish.
- Adjustable +/- 25 mm AISI leg.
- Cabinet executed with H2 radius.
- Connector between Grandis product on the front and the back.
- IPX4 water protection level.


INCLUDED ACCESSORIES

- Wok stand.
- Generator filter.
- Wok made of Stainless Steel 409.


OPTIONAL ACCESSORIES

- Joint clip GR.
- Power cable, H07RN-F (5 x 2.5 mm) p/mtr.


FRONT

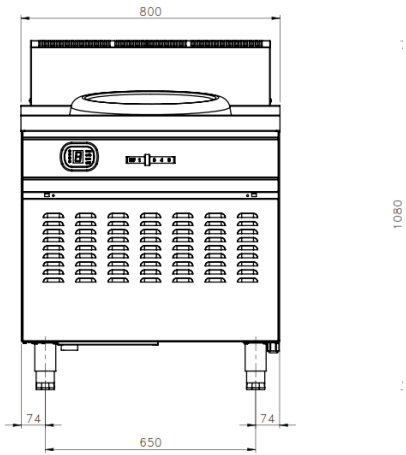

TOP

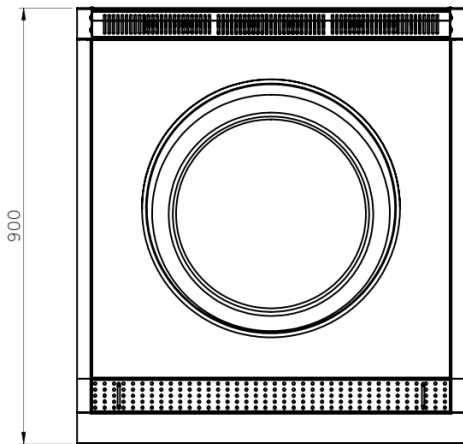

SIDE

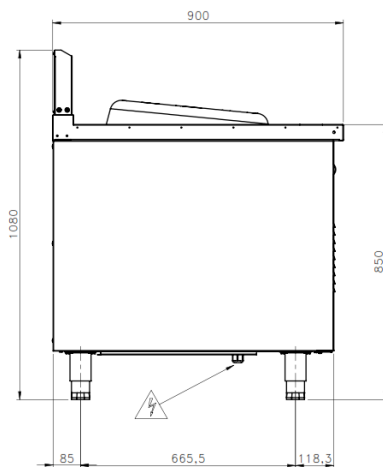

*Overall dimension in mm

TECHNICAL DATA

External Dimensions

Width : 800 mm
 Depth : 900 mm
 Height : 850/1080 mm

Cooking Surface

Cooking zones : Ø 400 mm
 Heating zones : 1
 Control type : Modulating power control

Electrical Supply Data

Total connected load : 8 kW
 Voltage : 400V, 3NPE AC /50-60Hz
 Recommended fuse : 16 A (slow)

Connections

Water : N/A
 Drain : N/A

Heat & Steam Emissions

Direct heat emission : 0.56 kW
 Latent heat emission : 0.22 kW
 Steam emission : 0.33 kg/h

PACKAGING DATA

Width : 830 mm
 Depth : 930 mm
 Height : 1200 mm
 Volume : 0.93 m³

WEIGHT

Net Weight : 72 kg
 Gross Weight : 86 kg