

## Smart Oven - Convection Oven

### Gas - Convection Oven

#### NGCO 1011



Due to continuous technical development, the image shown may not represent the latest design of the unit.

#### DESCRIPTION

Gas Convection oven powered by gas burner with 20 kW power rate.

Usable for ten bakery trays of 400 x 600 mm or ten gastronorm trays of 535 x 350 mm.

Equipped with temperature control and timer indicator. Baking with manual steam injection and open-close air system.

#### OTHER AVAILABLE MODELS

- NGCO 511

#### MAIN FEATURES

- Heated with maximum temperature of 275 degree Celcius.
- Bake with timer function up to 120 minutes or always on function.
- Equipped with gas ignition error indicator.
- Framed door with glass window to observe baking results.
- Includes both Gastronorm and Bakery type runners.
- Manual steam injection system.
- Includes lever to open and close oven chamber ventilation.
- Convection fan with reversible direction, switches automatically every two minutes.
- Baking capacity tested for 160 pieces of 30-gram croissants per cycle.
- Baking capacity tested for 120 pieces of 35 gram-danish raisin per cycle.

#### CONSTRUCTION


- Exterior panel constructed from stainless steel 304.
- Tempered glass door made of double layer to insulate heat inside the chamber.
- Durable double-locking handle.

#### INCLUDED ACCESSORIES

- Bakery tray runners.
- Gastronorm tray runners.

#### OPTIONAL ACCESSORIES

- N/A

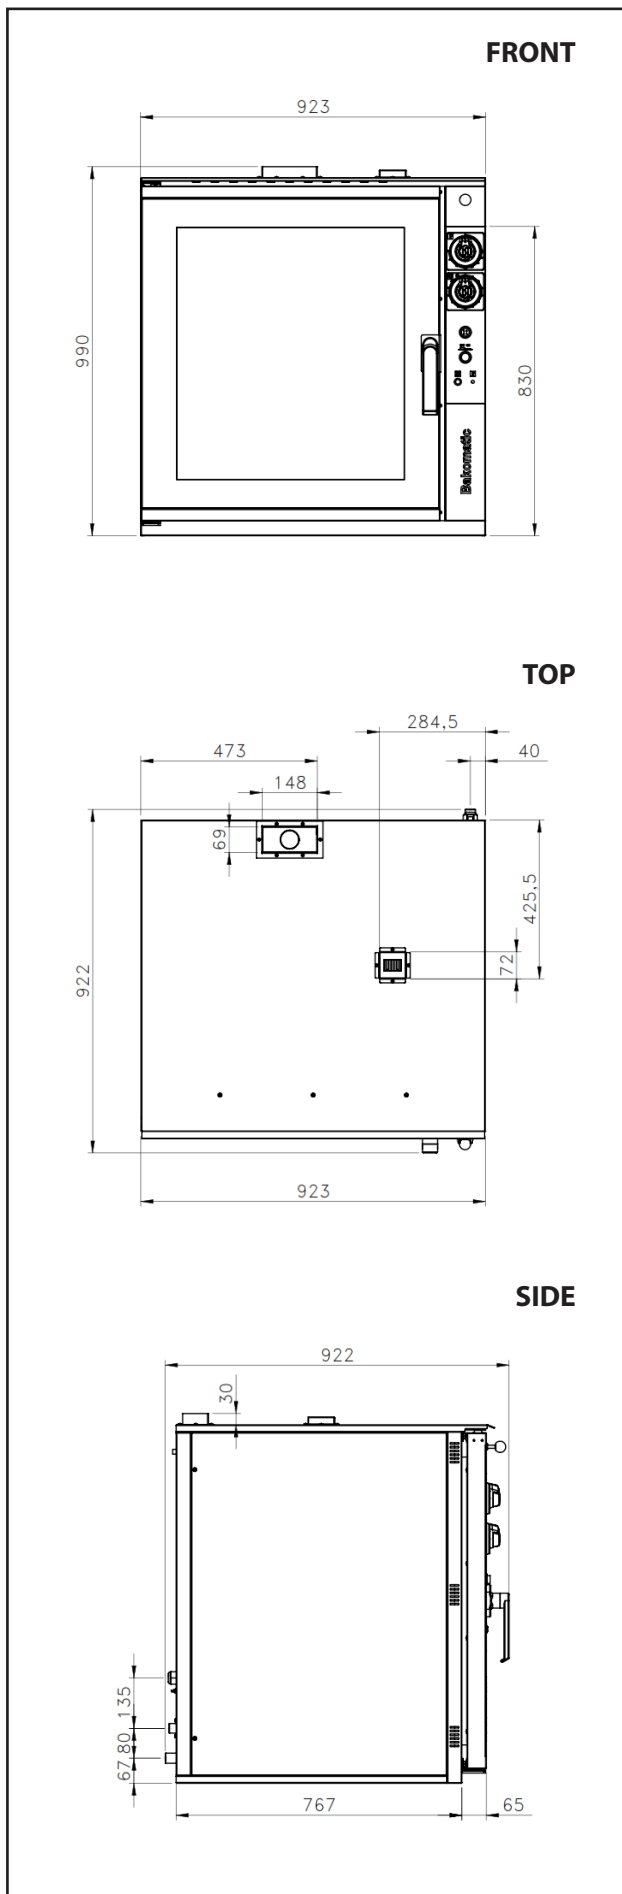

\*Overall dimension in mm

## TECHNICAL DATA

### External Dimensions

Width : 923 mm  
Depth : 922 mm  
Height : 990 mm

### Cooking Surface

Cooking zones : Ten bakery trays of 40 cm by 60 cm or ten gastronorm trays 1/1 with 8 cm pitch.

### Gas Power Rating

Heat input total : LPG/LNG 20 kW  
No. of burners : 2  
Control type : Temperature and Timer control  
Gas type options: LPG G30, G31  
LNG G20, G25

### Electrical Supply Data

Total connected load : 0.15 kW  
Voltage : 230V, 1NPE AC / 50-60 Hz  
Recommended fuse : 0.5 A (slow)

### Connections

Gas : DN 20 (3/4")  
Water : DN 20 (3/4")  
Drain : N/A

### Heat & Steam Emissions

Direct heat emission : 7 kW  
Latent heat emission : 4 kW  
Steam emission : 5.86 kg/h

### PACKAGING DATA

Width : 1000 mm  
Depth : 998 mm  
Height : 1140 mm  
Volume : 1.14 m<sup>3</sup>

### WEIGHT

Net Weight : 166 kg  
Gross Weight : 199 kg

PT. NAYATI INDONESIA

[www.nayati.com](http://www.nayati.com)

Nayati reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

23/01/2021