

**Oriental Cooking - Wok Range Chinese Pro**  
**Gas - Wok Kwalie with Blower**  
**NGKB 16-90 W2S1**



Due to continuous technical development, the image shown may not represent the latest design of the unit.

#### DESCRIPTION

Chinese Pro, high-performance gas wok with blower. Equipped with two 40 kW premix burners, built in a fire brick chamber for highest thermal efficiency with a low combustion noise of below 70 dBA and supplied with one clay-pot burner of 6.5 kW power rate in the rear. This wok is designed to meet the needs of professional Chinese chefs and is the perfect solution for high-frequent Asian restaurants.

Slanted, deep drawn 3.2 mm strong, reinforced top panel made of stainless steel AISI 304 with a heavy-duty removable cast iron wok ring and pot-holder for the clay pot burner. Cold-water supply with one swivel faucet mounted on the back-splash, easily operable from the front panel.

The intelligent deck cooling & cleaning system with spray nozzles guarantee an efficient cooling of the top panel and an enhanced hygienic as the food leftovers are flushed away towards the drain channel in the front. The built-in strainer avoids congestions of the drain.

#### OTHER AVAILABLE MODELS

- NGKB 11-90 W1S1
- NGKB 22-90 W2S2
- NGKB 12-125 W1S1
- NGKB 22-125 W2S2
- NGKB 14-125 W1S1N1
- NGKB 24-125 W2S2N2

#### MAIN FEATURES

- Two powerful 40 kW premix wok burners built in fire brick chambers for high thermal efficiency with low combustion noise (<70 dB).
- One atmospheric clay pot burner with a power rate of 6.5 kW.
- Concealed blower design.
- Electric ignition, piezo ignition for clay pot burner.
- Equipped with pilot burners, safety thermocouples, gas valves, gas knee levers and gas control knob.
- Slanted top panel with deep-drawn domes for wok and clay pot burner.
- Cold-water supply with one swivel faucet mounted on the back-splash.
- Deck cooling & cleaning system with spray nozzles for maximum hygiene and easy operation.
- Suitable for wok-pan sizes Ø 18-24" (457-610 mm).

#### CONSTRUCTION

- Sturdy frame made of stainless steel AISI 430.
- Slanted, reinforced deep drawn stainless steel top panel (3.2 mm), AISI 304 with hairline surface pattern.
- Front and side panels made of stainless steel AISI 430 with hairline surface pattern (0.8 mm).
- Backsplash made of stainless steel AISI 304 with hairline surface pattern (1.2 mm).
- Tubular, height adjustable ( $\pm 25$  mm) stainless steel legs.
- Types of installations: free standing or placed on a plinth.
- Frame, top and panels, all made of high-grade stainless steel.

#### INCLUDED ACCESSORIES

- Wok stand (2 pcs)
- Ladle / basket holder (2 pcs)

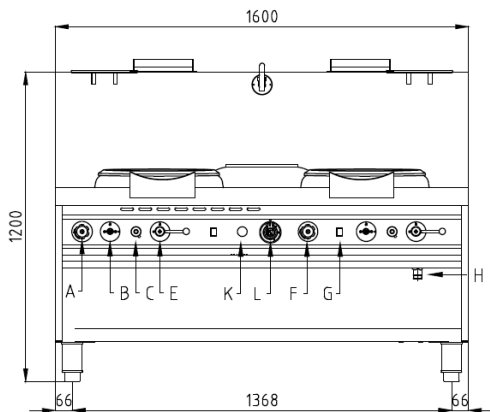
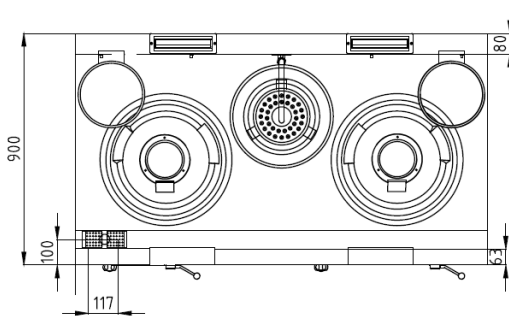
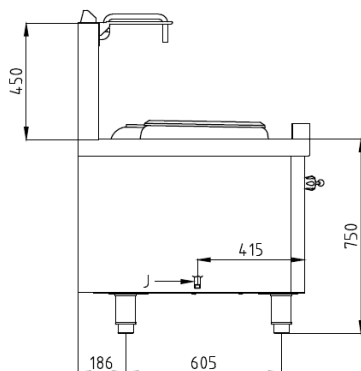
#### OPTIONAL ACCESSORIES

- N/A

PT. NAYATI INDONESIA

[www.nayati.com](http://www.nayati.com)

Nayati reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

**FRONT****TOP****SIDE**

\*Overall dimension in mm

**TECHNICAL DATA****External Dimensions**

|        |               |
|--------|---------------|
| Width  | : 1600 mm     |
| Depth  | : 900 mm      |
| Height | : 750/1200 mm |

**Cooking Surface**

|              |                |
|--------------|----------------|
| Wok burners  | : 2 x Ø 330 mm |
| Soup burners | : Ø 280        |

**Gas Power Rating**

|                  |  |
|------------------|--|
| Heat input total | : LPG/Natural Gas 86.5kW               |
| No. of burners   | : 3                                    |
| Control type     | : Open-close valve                     |
| Gas type options | : LPG G30, G31<br>Natural Gas G20, G25 |

**Electrical Supply Data**

|                      |                            |
|----------------------|----------------------------|
| Total connected load | : 0.38 kW                  |
| Voltage              | : 230V, 1NPE AC / 50-60 Hz |
| Recommended fuse     | : 6 A (slow)               |

**Connections**

|       |                 |
|-------|-----------------|
| Gas   | : DN25 (1")     |
| Water | : DN15 (1/2")   |
| Drain | : DN40 (1 1/2") |

**Heat & Steam Emissions**

|                      |                            |
|----------------------|----------------------------|
| Direct heat emission | : LPG/Natural Gas 21.62 kW |
| Latent heat emission | : LPG/Natural Gas 12.98 kW |
| Steam emission       | : LPG 22.92 kg/h           |

**PACKAGING DATA**

|        |                       |
|--------|-----------------------|
| Width  | : 1630 mm             |
| Depth  | : 930 mm              |
| Height | : 1320 mm             |
| Volume | : 2.00 m <sup>3</sup> |

**WEIGHT**

|              |          |
|--------------|----------|
| Net Weight   | : 415 kg |
| Gross Weight | : 472 kg |