

Oriental Cooking - Induction Wok Range

Induction - Wok Kwalie

NEWI 11-90 W1N1



Due to continuous technical development, the image shown may not represent the latest design of the unit.

DESCRIPTION

Guang Dong style induction wok with one glass-ceramic wok bowl Ø 400 mm built-in a slanted wok dome. Powered by a high-efficient, energy-saving induction coil of 15 kW connected load. Equipped with a neutral water-/soup pan in the rear. Compact design with a depth of 900 mm. This wok is the perfect solution for cooking authentically Asian dishes where gas appliances are restricted.

The power adjustment with five levels by easy to use power selection slider, and the LED display for the selected power level permits rapid heating and immediate operability. The impact-resistant wok bowl made of glass-ceramic with the stainless steel top surrounding is withstanding hard knocks in daily use.

The slanted, 3.2 mm strong reinforced top panel, the cold-water supply with one swivel faucet mounted on the backsplash together with the drainage channel in the front, guarantee maximum hygiene and enables an easy and time-saving cleaning of the top panel.

OTHER AVAILABLE MODELS

- NEWI 8-90 W1
- NEWI 8-90 W1 ER
- NEWI 15-90 W2
- NEWI 15-90 W2 ER
- NEWI 11-90 W1N1 ER
- NEWI 16-90 W2N1
- NEWI 16-90 W2N1 ER
- NEWI 22-90 W2N2
- NEWI 22-90 W2N2 ER

MAIN FEATURES

- One impact-resistant glass-ceramic wok bowl Ø 400 mm.
- One high-efficient, energy saving induction coil with 15 kW connected load.
- Five level power adjustment with power selection slider.
- LED display to indicate the selected power level and the operation modes.
- Slanted, reinforced top panel with dome for glass-ceramic wok bowl.
- Cold-water supply with one swivel faucet mounted on the backsplash.
- Drain channel with removable strainer in the front for easy operation and maximum hygiene.
- Stainless steel, 9 liters water/soup pan (1 pc).
- CE certified unit.

CONSTRUCTION

- Sturdy frame made of stainless steel AISI 430.
- Slanted, reinforced stainless steel top panel (3.2 mm), AISI 304 with hairline surface pattern.
- Front and back panels (0.8 mm), side panels (1.2 mm) made of stainless steel AISI 304 with hairline surface pattern.
- Backsplash made of stainless steel AISI 304 with hairline surface pattern (1.2 mm).
- Tubular, height adjustable (±25 mm) stainless steel legs.
- Types of installations: free standing or placed on a plinth.
- Frame, top and panels, all made of high-grade stainless steel.

INCLUDED ACCESSORIES

- Wok stand (1 pc)
- Ladle / basket holder (1 pc)
- Condiment tray (1 pc)
- Wok pan Ø 500 mm, stainless steel AISI 409

OPTIONAL ACCESSORIES


- Power cable type: H07RN-F (5 x 4 mm2).

PT. NAYATI INDONESIA


www.nayati.com

Nayati reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.


FRONT

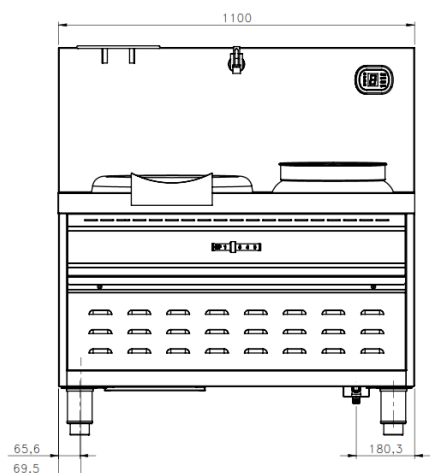

TOP

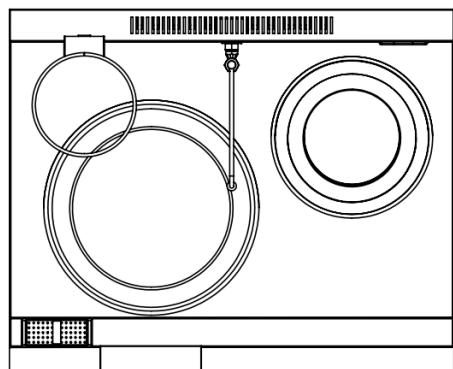

SIDE

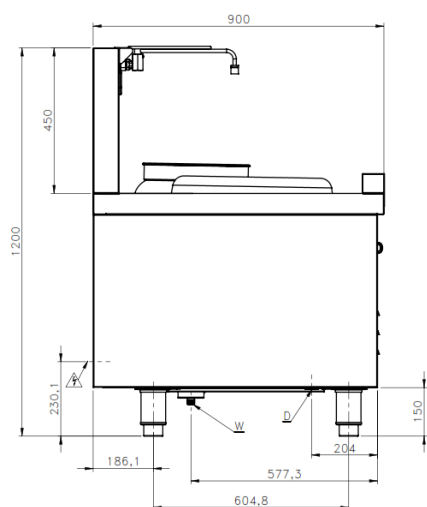

*Overall dimension in mm

TECHNICAL DATA

External Dimensions

Width	: 1100 mm
Depth	: 900 mm
Height	: 750/1200 mm

Cooking Surface

Wok hobs	: Ø 400
Heating zones	: 1 x 15 kW
Control type	: Modulating power control

Electrical Supply Data

Total connected load	: 15 kW
Voltage	: 400V, 3NPE AC /50-60Hz
Recommended fuse	: 25 A (slow)

Connections

Water	: DN15 (1/2")
Drain	: DN32 (1 1/4")

Heat & Steam Emissions

Direct heat emission	: 1.05 kW
Latent heat emission	: 0.42 kW
Steam emission	: 0.62 kg/h

PACKAGING DATA

Width	: 1130 mm
Depth	: 930 mm
Height	: 1320 mm
Volume	: 1.39 m ³

WEIGHT

Net Weight	: 98 kg
Gross Weight	: 118 kg

PT. NAYATI INDONESIA

www.nayati.com

Nayati reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

30/09/2020