




Total Food-Service Solutions

Oven

Gas Combi Steamer

NCG1011 T1

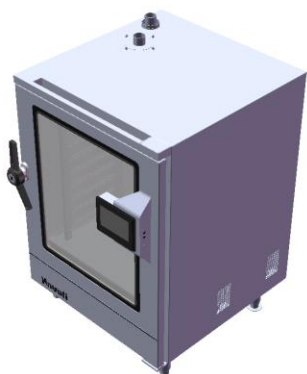

*Due to routine technical improvement, the photograph shown may not represent the latest design of the products.

AVAILABLE MODEL

1. NCG 1011 T1

DESCRIPTION

Combi Steamer with a high resolution 7" touch screen control panel. Air input: fresh air is blown into the oven from the top, after it is pre-heated it is pulled through the bi-functional fan, guaranteeing cooking evenness. Exhaust unit: special exhaust unit with integrated drain for sprinkling condensate. No water on the floor and combi steamer. All wick be load into the central drain. Three cooking mode: manual cooking (steam, combi steam and hot air), smart cooking (select type food), recipes book (user can retrieve and run any programmed recipe that they have saved in the recipe book). Automatic pre-heating and pre-cooling. Have 1 – 10 speeds ventilation control.

ITEM# : _____

MODEL# : _____

NAME : _____

SN : _____

Food probe with 4 temperature sensors (the lowest one drives the cycle). Double-glass door with book-like opening maintains a cool external temperature and incorporates a drip pan to collect excess condensation avoiding wet floors. Halogen lighting in the cooking chamber. Side panel and interior in AISI 304 stainless steel. Safety lock handle, left and right.

MAIN FEATURE

- Hot air 30° – 250° C
- Steaming 30° – 130° C
- Combi steaming 30° – 250° C.
- Regeneration
- Manual cooking
- Smart cooking
- Recipe book
- Delta T cooking 20° – 99° C
- Core temperature 20° – 99° C
- Core keep (hold time)
- Pre-heating
- Humidity set up 0% - 100%
- Start time preset
- Integrated door contact switch
- Touch screen display 7"
- Storage of 150 recipes.
- 12 program steps
- Cookbooks with cooking programs
- Additional regeneration/banqueting cookbook
- Quick heat/pre-heat button
- Speed 1 – 10 ventilation
- Log book
- Service diagnostic program
- Standard multi point core temperature sensor
- Open and closed system, controlled humidity system

APPROVAL : _____

PT. NAYATI INDONESIA
www.nayati.com
nayati@nayati.com

The company reserves the right to make modifications to the products without prior notice.
All information correct at time of printing.
2020.03.27



Gas Combi Steamer
NCG 1011 T1
Oven

- Nayati clean, automatic cleaning system (NACS)
- Liquid cleaner/detergent, non-corrosion
- Hand shower, with on/off possibility
- Continuously door drain to central drainage
- Halogen illumination of cooking chamber, adjustable
- Flashing illumination at end of program
- Door hinged left or right side
- Door interior easy to clean
- Pluggable door gasket
- High quality hygienic stainless steel chamber 304
- Pre-heating of fresh air
- Closed front plate, no access of water and steam into the cabinet
- Special designed drain for sprinkling condensate at exhaust pipe
- Access to electronics in the front
- Separate soft water connection
- Integrated fat separation system (optimal)
- Central direct drain
- No extra funnel needed because of Nayati internal safety system
- Waste water connection
- Fast cooling down of chamber, dry and wet
- Height adjustable feet
- IPX 5
- Special voltage (optional)
- Marine version (optional)
- Prisoner version (optional)
- Motor break
- 2 fan in 10 trays combi steamer.

Construction

- IPX 5 splash water protection certification for easy cleaning.
- All exterior panel in 304 type of stainless Steel.
- Seamless hygienic cooking chamber with all rounded corners for easy cleaning.
- Double thermo-glazed door with open frame construction, for cool outside door panel.
- Swing hinged easy-release inner glass on door for easy cleaning.
- Swing hinged front panel for easy service access to main component

Included Accessories


- User
- Installation
- PVC elbow 50 mm
- PVC pipe 50 mm
- Wiring diagram

Optional Accessories

- Bakery rack
- Chicken rack
- Water softener
- Chemical (rinse acid and detergent)
- Transport trolley
- GN Trolley
- Auto Cleaning
- GN Pan
- Regeneration Trolley
- Duck Trolley
- Stand

APPROVAL

:

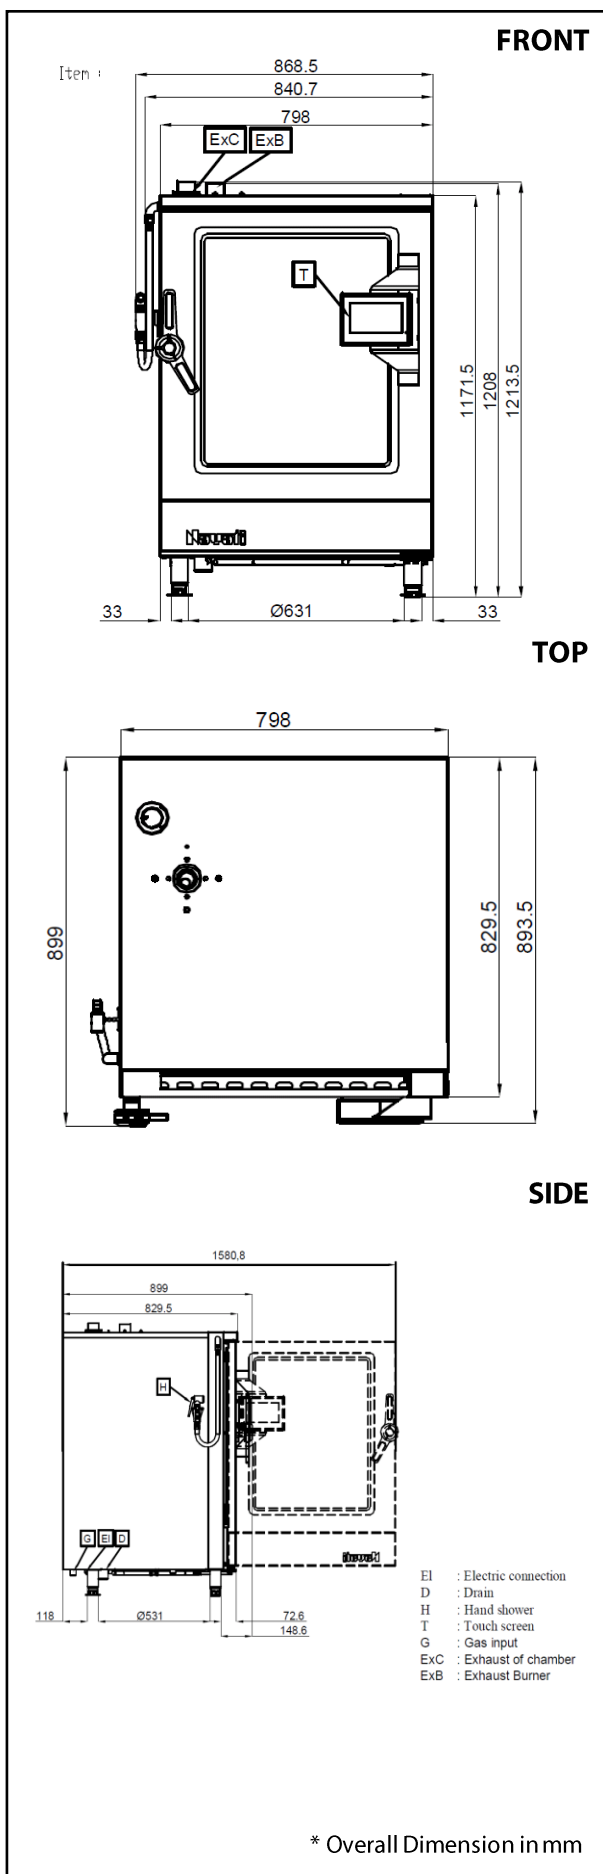

ELECTRIC

Electrical rating (kW)	:	0.6
Element rating (kW)	:	0.6
Electrical supply voltage	:	230V 1N
Required electrical supply (amps):	:	3
Power cable	:	~ Cable type: H70RN-F
	:	~ Cable dimension : 3 x 2.5mm ²

Electrical current split (amps)	:	L1: 3
Direct heat emission	:	0.12 kW
Latent heat emission	:	0.18 kW
Steam emission	:	0.26 Kg/h

GAS

Gas Power	:	22 kW
Gas Type Option	:	G30/G31, G20
Natural Gas Pressure	:	G20 : 20 mbar
LPG Pressure	:	G30 : 28-30, G31 : 37 mbar
Direct heat emission	:	3 kW
Latent heat emission	:	3.6 kW
Steam emission	:	5.3 Kg/h

KEY INFORMATION

Capacity	:	10 x 1/1 GN
Water Supply	:	2 x R 3/4"
Water Pressure	:	200-600 kPa
Water Drain	:	Ø 50 mm
Net weight	:	165 kg

PACKING DETAILS

Shipping width	:	798 mm
Shipping depth	:	829.5 mm
Shipping height	:	1171.5 mm
Shipping volume	:	0.77 m ³
Gross weight	:	kg

APPROVAL : _____