

Oriental Cooking - Roaster & Grill

Gas - Super Grill

NGSG 14-75 1W



Due to continuous technical development, the image shown may not represent the latest design of the unit.

DESCRIPTION

Gas Super Grill with two heating zone of 2 x 7.6 kW and height-adjustable resting area. Average gas consumption during normal use is 2 x 5.7 kW.

Made of stainless steel, equipped with a refractory insulated chamber and an incorporated blower system patented technology.

Supplied with a rack to accept GN containers for condiments and a spacious cabinet with doors for storage purposes.

OTHER AVAILABLE MODELS

- NGS 8-75 1W

MAIN FEATURES

- Powered with fan-assisted 2 x 7.6 kW gas burners. With cooking area of 2 x 530 x 500 mm or 2 x 2650 square cm.
- Burner is covered with high-temperature resistant refractory stones.
- Equipped with variable heating control to perfectly create a grilling results.
- Automatic ignition through one power switch.
- Designed to atomize grease and fat so no grease container is needed.
- Equipped with flame failure device.
- Condiment rack for GN-containers.
- Spacious base cabinets with two doors.
- Height-adjustable rack area for warming.

CONSTRUCTION

- Unit made of stainless steel AISI 304.
- Top (1.5 mm), stainless steel AISI 304 with orbital pattern.
- Front, side and back panels (1.5 mm) made of stainless steel AISI 304 with hairline surface pattern.
- Back panel (1.0 mm) made of stainless steel AISI 304 with hairline surface pattern.
- Tubular, height adjustable (± 25 mm) stainless steel legs.
- Types of installations: free standing.
- Stainless steel framework with dark blue powder coated color finish.

INCLUDED ACCESSORIES

- Cast iron grill with 2 x 530 x 500 mm area.
- Grill scrapper.
- Grill lifter.
- Height-adjustable resting area.
- GN containers.

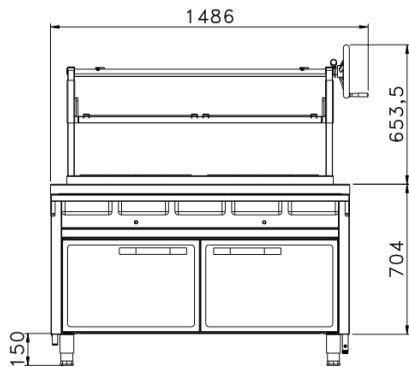
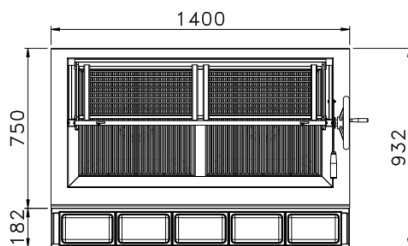
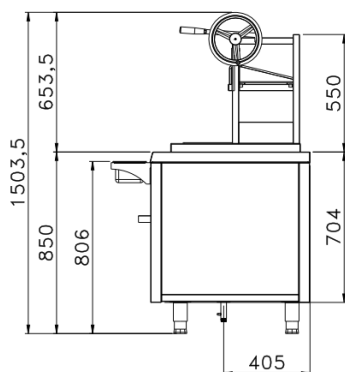
OPTIONAL ACCESSORIES

- N/A.

PT. NAYATI INDONESIA

www.nayati.com

Nayati reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

FRONT**TOP****SIDE**

*Overall dimension in mm

TECHNICAL DATA**External Dimensions**

Width	: 1400 mm
Depth	: 932 mm
Height	: 850/1504 mm

Cooking Surface

Cooking zones : 530 x 500 mm (2 pcs)

Gas Power RatingHeat input total : LPG/LNG 15.2 kW and 0.1 kW - 230V,
1NPE AC / 50-60 Hz

No. of burners : 2

Control type : Modulating power control

Gas type options: LPG G30, G31
LNG G20, G25**Electrical Supply Data**

Total connected load : 0.1 kW

Voltage : 230V, 1NPE AC / 50-60 Hz

Recommended fuse : N/A

Connections

Gas : DN 20 (3/4")

Water : N/A

Drain : N/A

Heat & Steam Emissions

Direct heat emission : 5.32 kW

Latent heat emission : 6.08 kW

Steam emission : 8.94 kg/h

PACKAGING DATA

Width : 1430 mm

Depth : 962 mm

Height : 1625 mm

Volume : 1.81 m³**WEIGHT**

Net Weight : 265 kg

Gross Weight : 330 kg